



RANPAK MAKES PACKAGING AS SIMPLE AS "ABC"

No matter what you are shipping, you simply won't find a packing material that is more versatile than PadPak®. From the heaviest product to the most sensitive part, we're the natural choice. In fact, all Ranpak® products are recyclable, renewable and biodegradable.



AutoPad converter with packing station stand

General Specifications:

Size.....	12.25"H x 34"W x 57"L
Weight.....	495 lbs. (shipping wt. 540 to 640 lbs.)
Power.....	120 VAC, 60 Hz, 10.4 Amps
Paper.....	single, double or jumbo rolls
Feed Rate.....	approximately 18 inches per second
Cut Method.....	electric motor with clutch
Controls	located on a remote box

PadPak® AutoPad®

The PadPak® AutoPad® system is an extremely versatile multi-ply paper packaging system that is ideal for the four in-the-box packaging applications: cushioning, wrapping, blocking & bracing and void fill. The system is designed to work in conjunction with the microprocessor remote box, which contains the operator controls. The converter itself rests in one of multiple stand options and is connected to the remote box via quick disconnects, allowing the remote box to be removed to change operating features or for service.

MICROPROCESSOR REMOTE BOX

KA-0328

KA-0329 (with counter)

The AutoPad® system is controlled by a microprocessor remote box. This remote box contains the operator controls that incorporates a number of state-of-the-art features and can be mounted on the converter or put on a separate stand. The remote box offers five modes of operation, which are explained below.

OPERATING MODES

FEED CUT

When the operator selects feed cut operation, the converter feeds out a pad while the foot switch is being depressed. When the foot switch is released, the pad is cut automatically.

AUTO FEED

The operator sets the pad length in inches by moving a push wheel switch to the required length. Cutting is accomplished by simultaneously pressing two "cut" push-buttons. After the cut is complete, another pad is fed out automatically. The operator can feed out additional pad lengths by pressing the foot switch.

AUTO FEED/AUTO CUT

In this mode the machine continuously feeds a pad of the length determined by the push-wheel switch and automatically cuts the pad to the desired length. The feed cycle begins again with no operator intervention. The converter produces pads equal to the number set on the optional counter by the operator. Without the optional counter, the cycle continues until the machine is turned off. This mode is ideal for creating a batch of same size pads that can be delivered to various workstations.

ELECTRONIC DELIVERY SYSTEM (EDS)

In the EDS mode a sensor detects the presence of a pad in the output chute of the machine. When the operator removes the pad, another pad is fed out automatically to the length determined by the operator-controlled push-wheel switch. The pad is cut automatically. No other action takes place until the pad is removed. This cycle will continue until the machine feeds out pads equal to the number preset on the optional counter by the operator. Without the optional counter, the cycle continues until the machine is turned off.

KEYPAD


The keypad is used by the operator to select one of fourteen pad lengths from 10 to 78 inches. When one of the buttons is pressed, a pad of the selected length is dispensed and cut automatically.




PadPak® AutoPad®

STAND OPTIONS


Packing Station

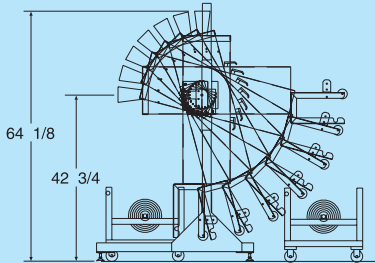

Parallel



Extra High Crossover



The AutoPad® converter, methods performed thereby, and/or products produced therefrom are covered by a plurality of patents worldwide.

STAND OPTIONS

The AutoPad® converter rests in one of multiple stand options. Several options are available to accommodate different packaging environments. The stand options are explained in detail below.

PACKING STATION KS-0099

The packing station has the AutoPad mounted on a swivel so it can be adjusted from a vertical to a horizontal position in 15 degree increments. This stand comes standard with casters, a roll lifter, a remote box swivel mounting kit and a tear free kit.

CROSSOVER KS-0005

The crossover stand lets the AutoPad converter dispense paper over a conveyor directly facing the operator. It is adjustable from 40 to 60 inches. Paper is loaded directly on the converter. This stand comes standard with leveling feet.

PARALLEL KS-0004

The parallel stand places the AutoPad converter parallel to the conveyor. Rolls of paper are mounted directly on the machine. This stand comes standard with leveling feet.

EXTRA HIGH CROSSOVER KS-0007

The crossover stand lets the AutoPad converter dispense paper over a conveyor directly facing the operator. It is adjustable from 57 to 77 inches. Paper is loaded directly on the converter. This stand comes standard with leveling feet.

All Ranpak® products are recyclable, renewable, and biodegradable. The right choice for just about anything you could want to protect, including the environment.



© Copyright 2004 Ranpak Corp.

SHIPPING ADDRESS: 7990 Auburn Road
Concord Township, OH USA 44077
MAILING ADDRESS: P.O. Box 8004
Painesville, OH 44077-8004

TELEPHONE: 440-354-4445
TOLL-FREE: 800-726-7257
FACSIMILE: 440-639-2199
E-MAIL: inquiries@ranpak.com
WEB SITE: www.ranpak.com



AD-0062/0504